


## PATRONES ESTANDAR DE CORRIENTES INDUCIDAS

Se fabrican con ranuras de 0.2 (0.008"), 0.5 (0.020") y 1.0 mm (0.040") para permitir la calibración correcta.

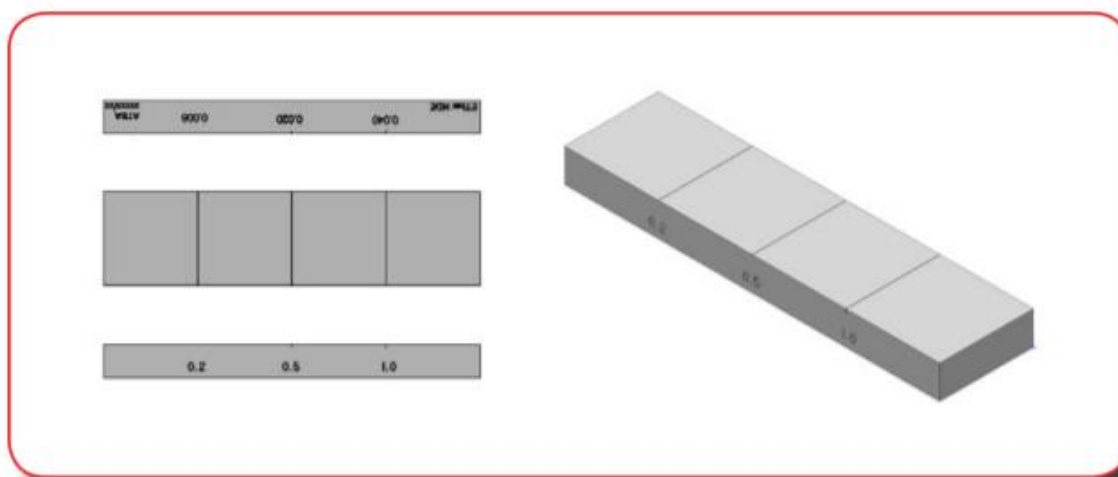

| <b>Accesory Test Block</b> |                         |
|----------------------------|-------------------------|
| <b>Pt No</b>               | <b>Material</b>         |
| <b>ATBF</b>                | Ferrous (Steel EN1A)    |
| <b>ATBA</b>                | Aluminium Alloy 7075-T6 |
| <b>ATBT</b>                | Titanium 6A14V          |
| <b>ATBS</b>                | Stainless Steel         |
| <b>ATBM</b>                | Magnesium               |